

Series 1700



EAGLESTONE
EQUIPMENT

Series 1700 Constant Turn Conveyor

FEATURES

- Made in the USA
- 304 stainless steel construction
- Extreme wash down
- Severe duty gear motor

DESIGN HIGHLIGHTS

- Food-safe applications
- Very quiet operation
- Few spare parts
- Fast & easy cleaning
- Low operating cost
- Long lasting design

OPTIONS

- Nema 4X VFD
- 20° to 180° turn
- Full welded top
- Stainless motor and reducer
- U-bar filler rods
- Transfer rollers or plates
- S.S. Casters

Eaglestone Inc.
3705 Swenson Ave.
St. Charles, IL 60174

Tel: 630-587-1115
Fax: 630-587-1116
Email: cs@eaglestoneinc.com

www.EaglestoneEquipment.com



- Custom Designed systems are available to suit individual application.
- Flat, uniform surface for gentle product handling.
- Meets stringent sanitation requirements
- Maintains proper orientation of your product.

The 1700 series was designed and engineered to be dependable and longer lasting than other turns in the industry.

The 1700 constant turn conveyor's radius is smaller and does not require an in-feed or discharge tangent compared to most standard radius conveyors.

The Eaglestone 1700 constant turn is available in sizes ranging from 12" wide to 36" wide and turn angles from 20° to 180°. All stainless steel wear strips and pulleys are available for cooking operations.



All bolt together connections have standoffs to aid in cleaning and minimize harbor points.



EAGLESTONE
EQUIPMENT

Series 1700



EAGLESTONE

EQUIPMENT

Series 1700 Constant Turn Conveyor

FEATURES

- Made in the USA
- 304 stainless steel construction
- Extreme wash down
- Severe duty gear motor

DESIGN HIGHLIGHTS

- Food-safe applications
- Very quiet operation
- Few spare parts
- Fast & easy cleaning
- Low operating cost
- Long lasting design



OPTIONS

- Nema 4X VFD
- 20° to 180° turn
- Full welded top
- Stainless motor and reducer
- U-bar filler rods
- Transfer rollers or plates
- S.S. Casters

Eaglestone Inc.
3705 Swenson Ave.
St. Charles, IL 60174

Tel: 630-587-1115
Fax: 630-587-1116
Email: cs@eaglestoneinc.com

www.EaglestoneEquipment.com

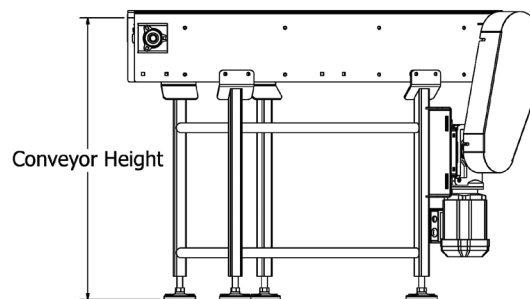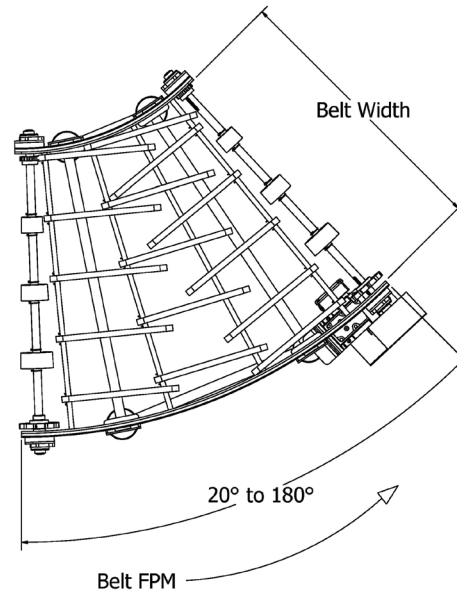

	Standard	Options
Speed	60 FPM	Variable Nema 4X VFD
Drive Location	Bottom Mount	Side Mount
Side Wall	11 ga. #4 304 stainless steel	7 ga. #4 304 stainless steel
Inside Turn Radius	30" inside radius	Non-standard upon request
Drive	1 HP, 230/460/3/60	DC, 115 VAC, Brake motor



EAGLESTONE

EQUIPMENT